



FABBRICA CAVI - ANTENNE - ACCESSORI TV




CW

WARNING CABLE

CEI-UNEL 36762 C-4 (U_o = 400 V)

Class CPR **E_{ca}**

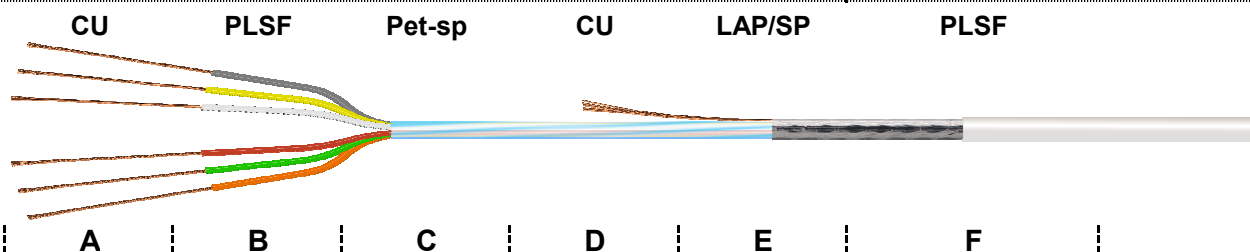

A	INNER CONDUCTOR		PLAIN COPPER
B	INSULATION		LOW SMOKE AND FUME POLYVINYL-CHLORIDE
C	NON-MIGRATING		SPIRAL POLYESTER TAPE
D	DRAIN WIRE		PLAIN COPPER
E	SHIELD		SPIRAL ALUMINIUM + POLYESTER TAPE COVERAGE 100%
F	SHEATH		LOW SMOKE AND FUME POLYVINYL-CHLORIDE

- PRINTING

**SIVA CAVO ALLARME SECTION MM² CEI-UNEL 36762
C-4 (U_o = 400 V) MADE IN ITALY CE 62 SETT/ANNO
EN 50575:2014 + A1:2016 E_{ca}**

TEMPERATURE RANGE -25°C / +80°C

MECHANICAL DATA

	CONSTRUCTION	SECTION	SHEATH		WEIGHT KG/KM TOTAL
CW 0222	2 x (7 x 0,15 mm)	2 x 0,22 mm ²	ø 3,10 ± 0,20 mm	White - RAL 9003	12,8
CW 0422	4 x (7 x 0,15 mm)	4 x 0,22 mm ²	ø 3,80 ± 0,20 mm	White - RAL 9003	19,1
CW 0622	6 x (7 x 0,15 mm)	6 x 0,22 mm ²	ø 4,40 ± 0,20 mm	White - RAL 9003	25,0
CW 0822	8 x (7 x 0,15 mm)	8 x 0,22 mm ²	ø 4,70 ± 0,20 mm	White - RAL 9003	30,4
CW 1022	10 x (7 x 0,15 mm)	10 x 0,22 mm ²	ø 5,50 ± 0,20 mm	White - RAL 9003	36,7
CW 1222	12 x (7 x 0,15 mm)	12 x 0,22 mm ²	ø 5,70 ± 0,20 mm	White - RAL 9003	41,4
CW 1422	14 x (7 x 0,15 mm)	14 x 0,22 mm ²	ø 5,90 ± 0,20 mm	White - RAL 9003	46,1

ELECTRICAL PROPERTIES at 20°C

	VOLTAGE		CORES RESISTANCE	MIN. RESISTANCE INSULATION
	OPERATING	TEST		
CW	150 V	2000 V	140 Ohm/Km	200 MOhm/Km

The producer reserves himself to make modification on the item without any notice.