



FABBRICA CAVI - ANTENNE - ACCESSORI TV




CW5

WARNING CABLE

CEI-UNEL 36762 C-4 (U₀ = 400 V)

Class CPR **E_{ca}**

CU PLSF Pet-sp CU LAP/SP PLSF

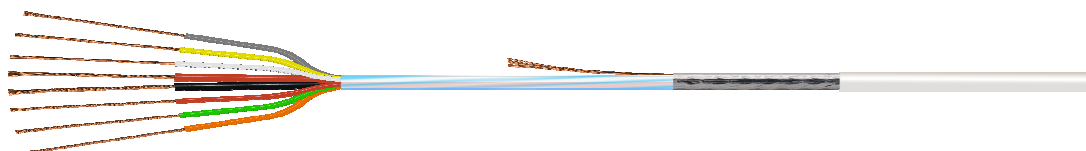

A B C D E F

A	INNER CONDUCTOR	PLAIN COPPER
B	INSULATION	LOW SMOKE AND FUME POLYVINYL-CHLORIDE
C	NON-MIGRATING	SPIRAL POLYESTER TAPE
D	DRAIN WIRE	PLAIN COPPER
E	SHIELD	SPIRAL ALUMINIUM + POLYESTER TAPE COVERAGE 100%
F	SHEATH	LOW SMOKE AND FUME POLYVINYL-CHLORIDE

- PRINTING

**SIVA CAVO ALLARME SECTION MM² CEI-UNEL 36762
C-4 (U₀ = 400 V) MADE IN ITALY CE 62 SETT/ANNO
EN 50575:2014 + A1:2016 E_{ca}**

TEMPERATURE RANGE -25°C / +80°C

MECHANICAL DATA

	CONSTRUCTION	SECTION	SHEATH		WEIGHT KG/KM TOTAL
CW 0222.5	2 x (7 x 0,15 mm)	2 x 0,22 mm ²	ø 4,30 ± 0,20 mm	White - RAL 9003	25,4
	2 x (16 x 0,15 mm)	2 x 0,50 mm ²			
CW 0422.5	4 x (7 x 0,15 mm)	4 x 0,22 mm ²	ø 4,80 ± 0,20 mm	White - RAL 9003	31,0
	2 x (16 x 0,15 mm)	2 x 0,50 mm ²			
CW 0622.5	6 x (7 x 0,15 mm)	6 x 0,22 mm ²	ø 5,20 ± 0,20 mm	White - RAL 9003	36,5
	2 x (16 x 0,15 mm)	2 x 0,50 mm ²			
CW 0822.5	8 x (7 x 0,15 mm)	8 x 0,22 mm ²	ø 5,60 ± 0,20 mm	White - RAL 9003	41,9
	2 x (16 x 0,15 mm)	2 x 0,50 mm ²			
CW 1022.5	10 x (7 x 0,15 mm)	10 x 0,22 mm ²	ø 6,20 ± 0,20 mm	White - RAL 9003	47,7
	2 x (16 x 0,15 mm)	2 x 0,50 mm ²			
CW 1222.5	12 x (7 x 0,15 mm)	12 x 0,22 mm ²	ø 6,40 ± 0,20 mm	White - RAL 9003	52,4
	2 x (16 x 0,15 mm)	2 x 0,50 mm ²			
CW 1422.5	14 x (7 x 0,15 mm)	14 x 0,22 mm ²	ø 6,60 ± 0,20 mm	White - RAL 9003	57,1
	2 x (16 x 0,15 mm)	2 x 0,50 mm ²			

ELECTRICAL PROPERTIES at 20°C

CW5	VOLTAGE		CORES RESISTANCE		MIN. RESISTANCE INSULATION
	OPERATING	TEST	0,22 mm ²	0,50 mm ²	
	150 V	2000 V	140 Ohm/Km	60 Ohm/Km	200 MOhm/Km

The producer reserves himself to make modification on the item without any notice.